

# HPL LEATHER SHEETS







# HPL LEATHER SHEETS

the simplest way of bonding!

SIBU HPL leather sheets combine the well known HPL manufacturing technology with the high standards of SIBU DESIGN PU leather surfaces.

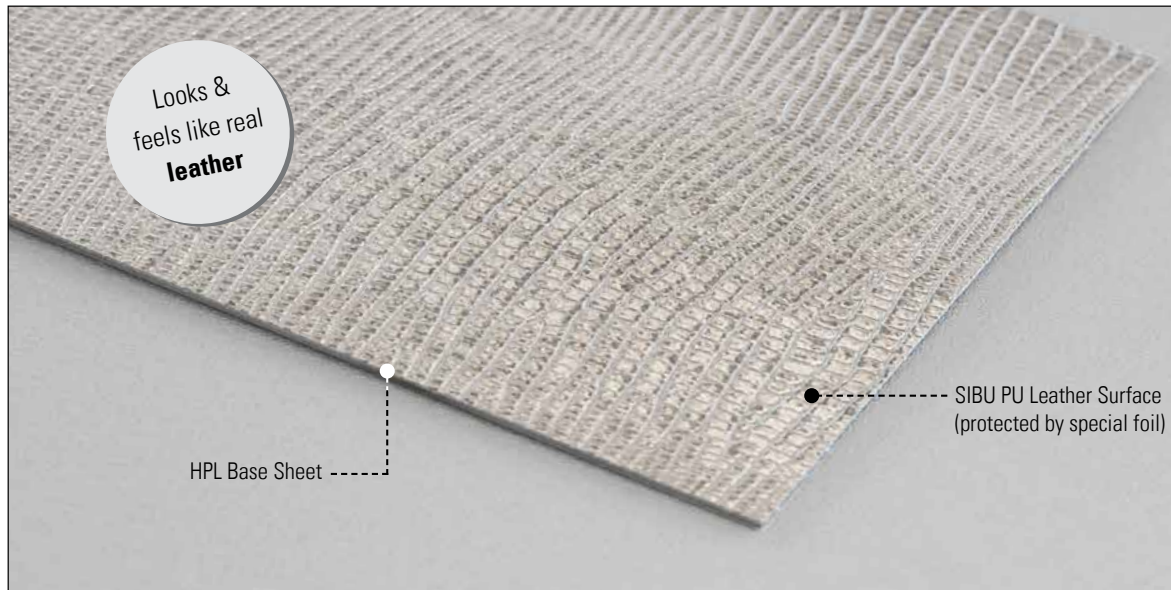

Composition on the example of HPL LL Leguan

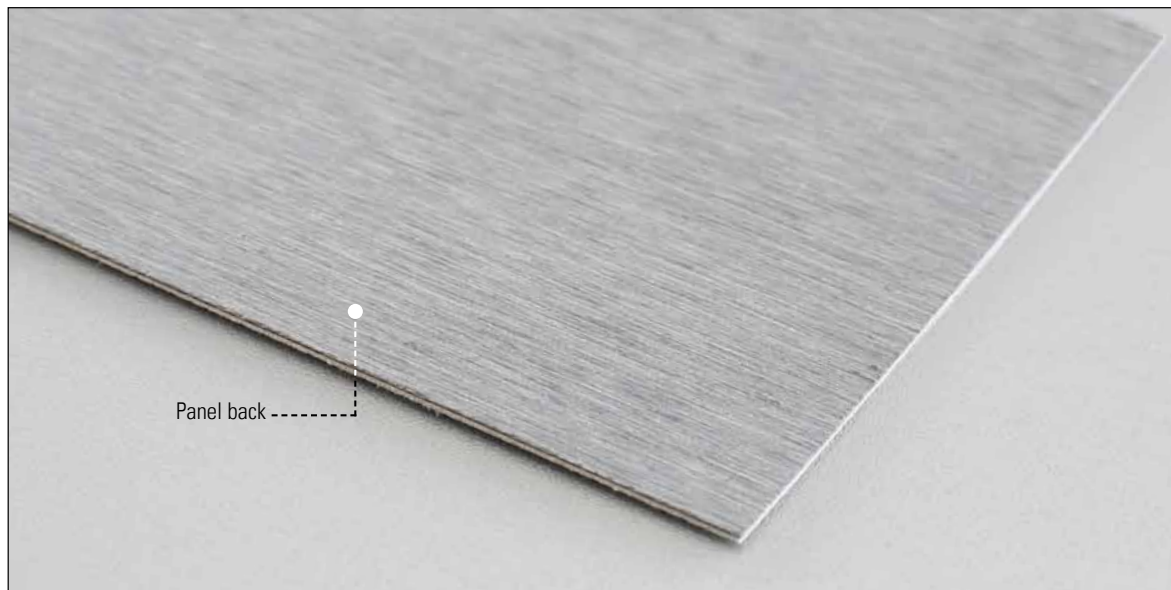

Back of the HPL leather sheet

## COMPO- SITION

Surface protection: transparent, light adhesive PE film

Top surface: PU leather with a thickness of 0.8 to 2.3mm

HPL base sheet: 1.0mm thickness

Total thickness: from 1.8 to 2.3 mm  
(the thickness of the synthetic leather surface layer represents the difference)

# HPL LEATHER SHEETS Delivery Programme

Our Sales team is pleased to inform about other versions.




**HPL LL Leguan Silver**   
2780x1280x1,8 **NA 15893**




**HPL LL Leguan Copper**   
2780x1280x1,8 **NA 15894**




**HPL LL Leguan Gold**   
2780x1280x1,8 **NA 15892**

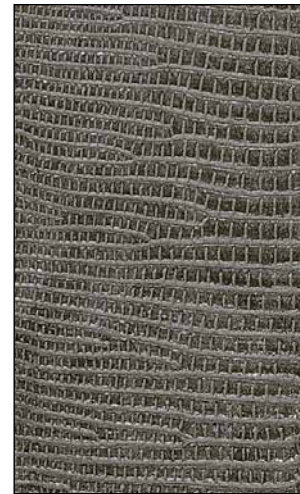


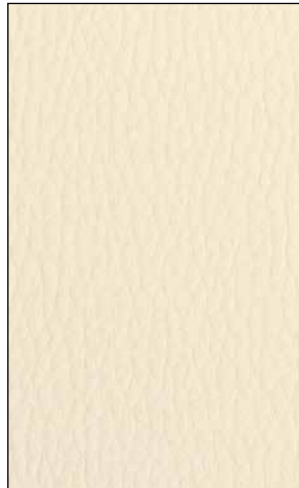
**HPL LL Leguan Nero**   
2780x1280x1,8 **NA 15895**



**HPL LL Leguan Bianco**   
2780x1280x1,8 **NA 15896**




**HPL LL White**   
2780x1280x2,3 **NA 15891**




**HPL LL Creme**   
2780x1280x2,3 **NA 15886**



**HPL LL Dark Brown**   
2780x1280x2,3 **NA 15889**

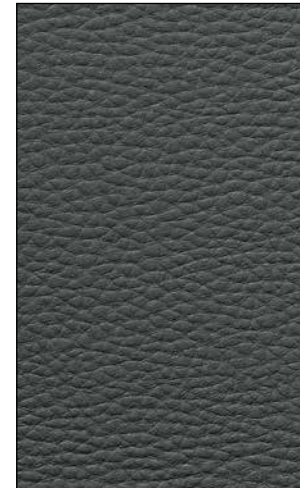


**HPL LL Black**   
2780x1280x2,3 **NA 15885**




**HPL LL Mocca matt**   
2780x1280x2,1 **NA 15900**

All variations  
available in  
format  
**2780x1280mm**

**NA** non-adhesive

 suitable for  
wet rooms

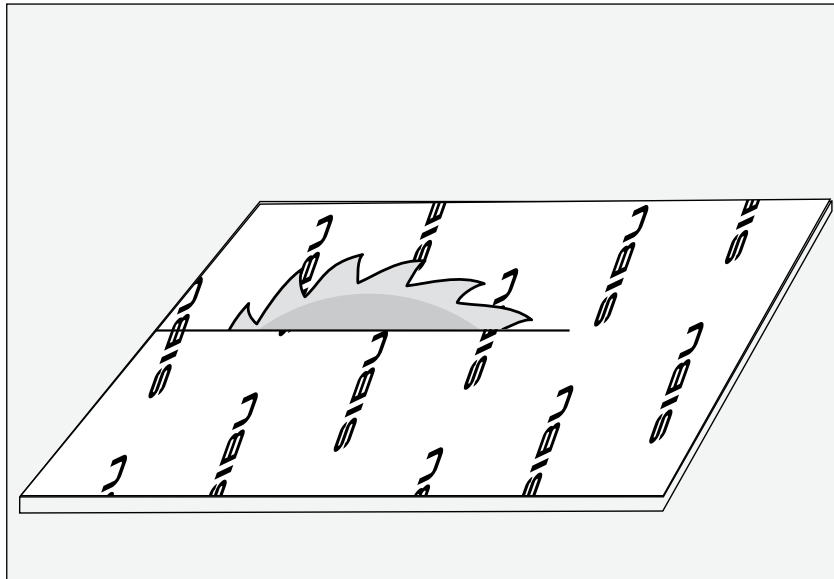

Sawing

## SAW BLADE INFORMATION

The following represents information regarding suitable saw blades for the lint- and thread-free cutting of HPL LEATHER SHEETS.

### Sheet split up saw


Diam: 255 mm (10 in.)  
Blade thickness: 2.8 mm  
Number of teeth: 80  
Execution: FZ/WZ  
RPM: 6,000-6,700

### Format circular saw

Diam: 300 mm (11.8 in.)  
Blade thickness: 3.2 mm  
Number of teeth: 90  
Execution: FZ/WZ  
RPM: 5,000-5,800

**PLEASE NOTE. Optimum cutting quality is obtained by using an overlay on the top surface.**

<b>Temperature resistance:</b>	The temperature characteristics of SIBU products do not alter in conjunction with the HPL plate.
<b>Inflammability:</b>	fire rating class B2 (DIN 4102)
<b>Suitability for wet rooms:</b>	to a limited extent
<b>Cleaning:</b>	cleaning only with soapy water and rag
<b>Storage:</b>	flat on pallet, dry, protected against light and dust
<b>Processing:</b>	in order to ensure lint- and thread-free cutting, please note our cutting blade information.
<b>Thickness:</b>	1.8-2.3 mm (see delivery program)
<b>Weight:</b>	6-7 kg/panel
<b>Package:</b>	flat packed

 This information tool was prepared to the best of our knowledge and with special care. The data provided is based on practical experience, test results and company experiments and corresponds with our current know-how level. No responsibility is accepted for misprints, standard-related mistakes and errors.

